

# AQUApro Select NT 12.0 SP


## Product description

P i04

Stand: 06.25




### System

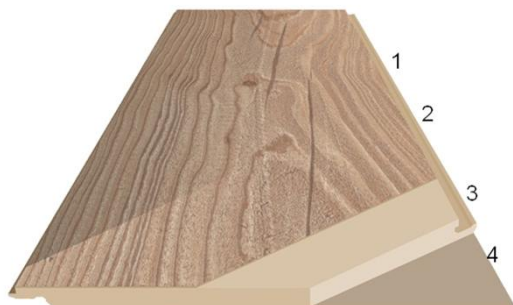

- 1 high-grade durable overlay
- 2 impregnated decorative paper
- 3 AQUApro HDF Substrate with edge sealing
- 4 balancer

### Profile



**Kaindl Tap Loc**  
profile longitudinal

**Kaindl Tap Loc**  
profile transversal

| Tests                                                    | Flooring <sup>1</sup><br>Symbols   | Results                                |
|----------------------------------------------------------|------------------------------------|----------------------------------------|
| Panel dimension                                          |                                    | 1383x193x12mm                          |
| Service category per<br>Standard per                     | EN ISO 10874<br>EN 13329<br>       | <b>33</b>                              |
| Abrasion resistance                                      | EN 13329<br>                       | <b>AC5</b>                             |
| Impact resistance<br>small ball<br>big ball              | EN 13329<br>                       | <b>≥70mm</b><br><b>≥1000mm</b>         |
| Formaldehyde emission of<br>the substrate before coating | EN 120 DIBT-<br>Richtlinie 100<br> | <b>E1</b> <b>[Europe]</b>              |
| Formaldehyde emission                                    | EN 717-1<br>EN 717-2               | < 0,1 ppm<br>< 3,5 mg/h m <sup>2</sup> |

All values are approximate values - fluctuations cannot be absolutely ruled out.

|                                                            |                                          |                                                                 |
|------------------------------------------------------------|------------------------------------------|-----------------------------------------------------------------|
| Formaldehyde emission/ VOC                                 |                                          | GREENGUARD GOLD                                                 |
| Formaldehyde emission                                      | CARB                                     | CARB Phase 2                                                    |
| Edge swelling                                              | EN 13329<br>                             | ≤ 12%                                                           |
| Thermal conductivity                                       | ISO 8302<br>                             | 0,0960 m².K/W                                                   |
| Moisture residue HDF                                       | EN 322                                   | 4 - 7 %                                                         |
| Resistance to cigarette burns                              | EN 438-2.18<br>                          | grade 4                                                         |
| Light fastness                                             | EN ISO 105-B02<br>EN 20105-A02<br>       | not worse than 6 Blue wool scale<br>not worse than 4 Grey scale |
| Lifting resistance                                         | EN 13329                                 | ≥ 1,25N/mm²                                                     |
| Resistance to stains                                       | EN 438-2.15<br>                          | groups 1-2 grade 5<br>group 3 grade 4                           |
| Combustibility                                             | EN13501-1<br>                            | Cfl , s1                                                        |
| Water resistance                                           | NALFA surface<br>watertest<br>01.08.2019 | qualitativ ≤ 2 and ≤0,3mm                                       |
| Sliding friction μ                                         | EN 13893<br>                             | ≥ 0,3                                                           |
| Dimensional variants after changes<br>in relative humidity | EN 13329                                 | length and width ≤ 0,9 mm                                       |
| Straightness of the panels                                 | EN 13329                                 | ≤ 0,30 mm /m                                                    |
| Hight difference between elements                          | EN 13329                                 | maximum ≤ 0,15 mm<br>average ≤ 0,10 mm                          |
| Squared elements                                           | EN 13329                                 | ≤ 0,2 mm / panel width                                          |
| Flatness of the element width                              | EN 13329                                 | concave ≤= 0,3 mm<br>convex ≤= 0,4 mm                           |
| Flatness of the element length                             | EN 13329                                 | concave ≤= 7 mm<br>convex ≤= 14 mm                              |
| System pattern matching widthwise                          |                                          | +/- 2mm                                                         |
| Ship's planking matching widthwise                         |                                          | +/- 4mm                                                         |

1)Information under [www.floorsymbols.com](http://www.floorsymbols.com)