

# TEST ATTESTATION

Contract No.: 2537/2017/82/1 - RB

29.06.2018  
NEF/MÜJ

Customer: Kaindl Flooring GmbH  
Kaindlstraße 2  
AT-5071 Wals/Salzburg

Subject: Laminate floor No. 82 of the type: "Easy Touch 8.0 Premium Plank"  
Test according to OENORM EN 15468 "Laminate floor coverings -  
Elements with directly applied printing and resin surface layer -  
Specifications, requirements and test methods"

Result:

Classification requirements		
Wear resistance	AC4	
Impact resistance	small ball	≥ 12 N
	large ball	≥ 750 mm
Resistance to staining	Group 1 and 2	level 5
	Group 3	level 4
Effect of a furniture leg	no damage is visible	
Effect of a castor chair	no damage is visible	
Thickness swelling	≤ 18,0 %	
Locking strength	$f_{10,2} \geq 1 \text{ kN/m}$	
	$f_{50,2} \geq 2 \text{ kN/m}$	
Surface soundness	≥ 1,25 N/mm <sup>2</sup>	


The tested laminate floor fulfils all requirements of OENORM EN 15468 for the level of use class 32. The formaldehyde release determined according to OENORM EN ISO 12460-3 is below the allowable limit for faced wood- based panels which is given in the Austrian formaldehyde regulation and in DIBt-Guideline 100 (E1). Since 01.01.2009 only substrates certified according to CCR, Title 17 93120.2(a) Phase 2 (CARB Regulation) are used by the manufacturer. Measured contents of the respective heavy metals, chrome VI and organic tin compounds were below the requirements of OENORM EN 71-3.

Period of validity: June 2019

HOLZFORSCHUNG AUSTRIA



Dr. Franz Neumüller  
Technical consultant

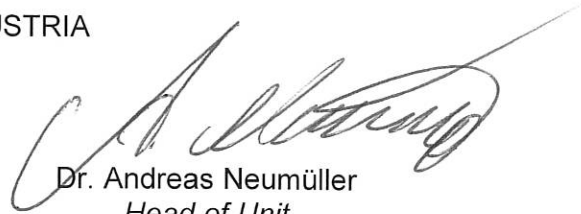

Dr. Andreas Neumüller  
Head of Unit

In case of dispute the original German version prevails. This translation is for information purposes only.